

Outdoor Bullet Network Camera
CS400 • CS400P

Day/Night • H.264 • 30 IR LEDs
 Exclusive Mobile Viewer App

Key Features

- True Day / Night functionality with a mechanical IR-cut filter and 30 IR LEDs
- H.264 and MJPEG compression and dual video streaming
- Smart motion detection
- Support for email and SMS alert message
- Exclusive camera viewer app for popular smart-phones
- Support for Macintosh OS X 10.6 Snow Leopard
- Support for Power-over-Ethernet (CS400P only)
- Intelligent iWizard for easy and speedy setup
- 16-CH WebVUer for remote monitoring on browser



* CS400P only

Overview


Compro CS400 Series Network Camera Offers Unique Surveillance Features That Can Help Secure Your Home and Business and Give You Some Peace of Mind

Day & Night Technology for 24/7 Surveillance: When the camera's light sensor detects low-light conditions, the 30 built-in long-distance IR LEDs can be automatically switched on to provide additional infrared light that help deliver clear nighttime image. The built-in IR-cut filter placed in front of the image sensor can filter out invisible IR light in the daytime to produce accurate color image, and when in low light conditions, the IR-cut filter can be removed to achieve better light sensitivity.

Easy Installation and Setup: The camera uses intelligent iWizard to make setup fast and easy. With it, even novice users can complete the setup in 5

minutes. Also, installing Compro CS400 series camera does not require any networking expertise or router setup. Simply plug in the cables, install the camera software, and then your IP camera is ready to be viewed and shared anywhere, anytime from your PC or mobile phone.

SMS & Email Notification: The event notification feature enables the camera to send an alert message to user-specified recipients when it detects motion events. The SMS service runs on a web-based SMS gateway platform and does not impose any monthly fees. The Email service supports popular webmail platforms.

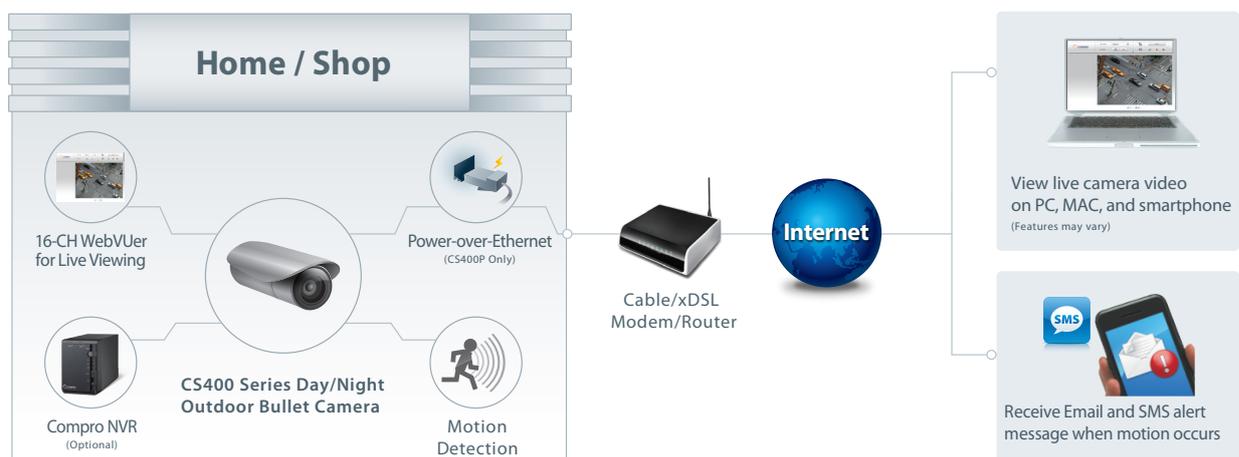

TECHNICAL SPECIFICATIONS

CAMERA

Image Sensor	1/4" progressive scan CMOS sensor
Lens	<ul style="list-style-type: none"> Focal length: 4.0 mm Max aperture ratio: F1.5 Fixed iris
Zoom	10x digital zoom
Angle of View	50° horizontal
Focusing Range	0.5 m ~ INF
Min. Illumination	<ul style="list-style-type: none"> IR mode: 0 lux, with 30 built-in IR LEDs in darkness (effective up to 20m) Color mode: 1.0 lux
Shutter Time	1/5 ~ 1/15000 sec.

VIDEO

Video Compression	M-JPEG, H.264 (MPEG-4 Part 10)
Resolution & Frame Rate	640 x 480 at 30 FPS
Video Streaming	Dual streaming supported
Image Settings	<ul style="list-style-type: none"> Adjustable image size and quality AGC, AWB, AES Configurable brightness, contrast, saturation and sharpness

NETWORK

Protocols	ARP, DDNS, DHCP, DNS, FTP, HTTP, ICMP/IPv4, IGP, NTP, PPPoE, QoS, RSP, RTSP, SMTP, SSL, TCP/IP, UDP, UPnP
Ethernet	10/100 Base-T, autosensing, RJ-45

FIRMWARE

Firmware	<ul style="list-style-type: none"> Support UPnP Support online firmware update
-----------------	--

REMOTE SURVEILLANCE

Mobile Surveillance	H.264/M-JPEG; exclusive camera viewer app for iPhone/Android phone
----------------------------	--

Web Surveillance WebVUer 16CH over Internet Explorer, Chrome, Firefox, Safari (features vary)

GENERAL

Unit Configuration	Rebooting, factory default, date/time synchronization, user profile management, firmware upgrade, OSD, date/time stamp, multilingual UI
User Group	2 levels, unlimited users, ID/password protected, max 10 simultaneous users
OSD	Text or image overlay, 4 locations
Language	Chinese Traditional, Chinese Simplified, German, Spanish, English, Japanese, Portuguese, Russian, Turkish, Ukrainian, Bulgarian
Regulatory	CE, FCC

Viewing System Requirements

- Computer with 1.7GHz processor and 512 MB memory or above
- Operating system: Windows XP SP3, Vista SP1, Windows 7, Macintosh OS X 10.6 Snow Leopard
- Internet browser: Internet Explorer 8.0 or later; non-IE browsers require 3rd-party VLC plug-in

Operating Conditions

- Operating temperature: 0 °C ~ 50 °C (32 °F to 122 °F)
- Humidity: 20~80% RH non-condensing

Package Contents

- CS400(P) network camera
- Software CD
- Quick installation guide
- Ethernet cable
- Bracket

PHYSICAL

Dimensions	148.5 mm (L) x 77 mm (W) x 74 mm (H) (with sunshield)
Net Weight	0.55 kg



POWER

Power Supply


- CS400: DC 12V/2A
- CS400P: PoE only (Power-over-Ethernet, IEEE 802.3af class 3)

Dimensions


With sunshield



Without sunshield



Bracket



* Specifications are subject to change without prior notice.

* For complete product information, please contact a Compro Authorized Security Professional near you or write to security@comprousa.com.

