
Floor Standing Data/Comms Cabinets

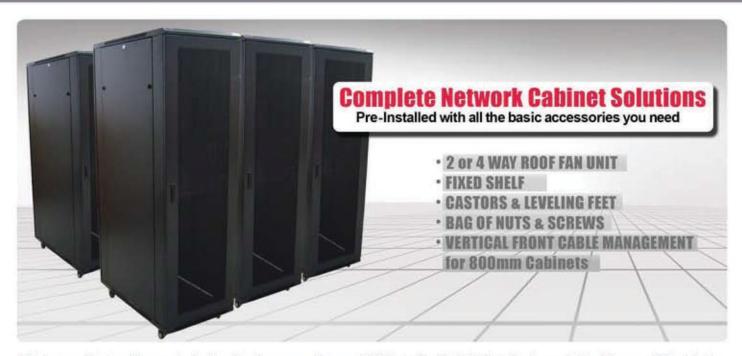

Offering excellent quality coupled with value for money, the new LMS Data EcoNetCab Data Enclosure is ideal for your IT installation, no matter how big or small.

Designed to exacting standards, the Telecom and Data Enclosure range offer total Networking and high valued IT device containment coupled with ease of installation and post maintenance. Used throughout both Public and Private Sector installations across the UK and Europe, they feature genuine useful features including superior hot air venting (both passive and active), heavy duty vertical uprights both front and back with can be fully adjusted and multiple cable entry points for correct cable placement Standard front and rear 19" uprights (which are fully adjustable) means they will host any number of Networking, Telco, VoIP, CCTV or Patch Panels using the standard 600mm(w) X 1000mm(d) design. The Enclosure is also avaliable as a 800mm(w) X 1000(d) design for installations need more space for cable patching etc.

Main Features:

Available in 600x600mm, 600x800mm and 800x800mm (with integral vertical cable management system)*

- · Standard, UK type Free Standing Enclosure
- ETSI standard 19" Front and Rear vertical profiles (2.0mm thickness & fully adjustable)
- Up to 800Kg static load capacity (ideal for Telecoms, Data and Battery Backup Rackmount devices)
- . Lockable front Glass (Tempered safety glass) Door with integral slotted air vents
- · Lockable rear door
- . Keys supplied as standard
- · Front and rear doors are fully reversible instantly
- . Lockable and removable side panels for easy equipment access
- · Front, rear and top vented slots for improved air flow
- · Multiple cable entry (gland plates) in the base of the Cabinet (sloted for precise cable fit)
- · Attached shipping/standard Duty Castors with supplied adjustable Jacking Feet
- · Supplied and fitted vented Shelf (for Modems, Routers and pedastal Computers etc)
- · Supplied with populated 'roof mount' Fan Tray for enhanced equipment cooling
- · Supplied with Vertical front cable management
- · Supplied Cabinet nuts and bolt fixings for devices
- · Powered coated finish
- RAL9044 (Black)

Standard:

 Comply with ANS/EIA RS-310-D, IEC297-2, DIN41497 PART1, DIN41494 Part 7, GB/T3047.2-92 Standard;

Material

- SPCC quality cold rolled steel
- · Thickness: Mounting profile; 2mm;

Loading Capacity:

Static loading : up to 800kg

Degree of protection:

IP20

Surface finish:

Degreasing, Picking, Phosphating, Powder Coated







